

PRELIMINARY SPEC

PATENT PENDING

XPower

Part Number : KA-1010ZG9ZC

Green



ATTENTION
OBSERVE PRECAUTIONS
FOR HANDLING
ELECTROSTATIC
DISCHARGE
SENSITIVE
DEVICES


Features

- *P-LCC-4 PACKAGE.
- *SINGLE COLOR.
- *HIGH LUMINANCE.
- *HIGH POWER, OPERATING CURRENT @350mA.
- *SUITABLE FOR ALL SMT ASSEMBLY METHODS.
- *PACKAGE : 500PCS / REEL.
- *RoHS COMPLIANT.



Description

Static electricity and surge damage the LEDs.
It is recommended to use a wrist band or anti-electrostatic glove when handling the LEDs.
All devices, equipment and machinery must be electrically grounded.

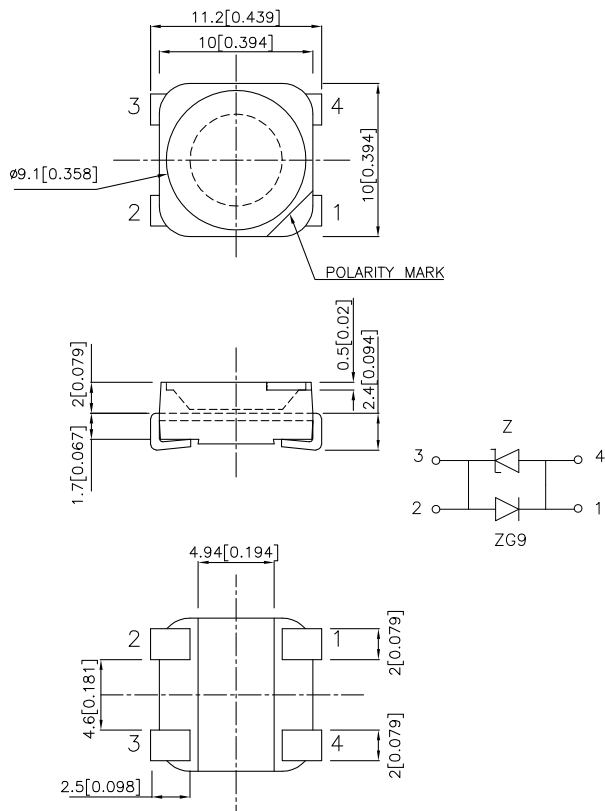

Applications

- *traffic signaling.
- *backlighting (illuminated advertising , general lighting).
- *interior and exterior automotive lighting.
- *substitution of micro incandescent lamps.
- *portable light source (e.g. bicycle flashlight).
- *signal and symbol luminaire for orientation.
- *marker lights (e.g. steps, exit ways, etc).
- *decorative and entertainment lighting.
- *indoor and outdoor commercial and residential architectural lighting.

Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.25(0.01)$ " unless otherwise noted.
3. Specifications are subject to change without notice.

Selection Guide

Part No.	Dice	Lens Type	luminous Intensity Iv(cd)@ 350 mA [1]		Φv (lm) @ 350 mA		Viewing Angle [2]
			Min.	Typ.	Min.	Typ.	2θ1/2
KA-1010ZG9ZC	GREEN (AlInGaN)	WATER CLEAR	5	6	14.3	17.1	120°

Absolute Maximum Ratings at TA=25°C

Parameter	Symbol	Value	Unit
Power dissipation	Pt	1.15	W
Reverse Voltage	VR	not designed for reverse operation	V
Junction temperature	TJ	110	°C
Operating Temperature	Top	-40 To +85	°C
Storage Temperature	Tstg	-40 To +85	°C
DC Forward Current [1]	IF	350	mA
Peak Forward Current [3]	IFM	500	mA
Thermal resistance [1]	Rth	47	°C/W







Notes:

- Results from mounting on PC board FR4(pad size≥100mm²), mounted on pc board-metal core PCB is recommend for lowest thermal Resistance.
- θ1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.
- 1/10 Duty Cycle, 0.1ms Pulse Width.

Electrical / Optical Characteristics at TA=25°C


Parameter	Symbol	Value	Unit
Wavelength at peak emission IF=350mA [Typ.]	λpeak	525	nm
Dominant Wavelength IF=350mA [Typ.]	λdom	530	nm
Spectral bandwidth at 50%ΦREL MAX IF=350mA [Typ.]	Δλ	45	nm
Viewing angle at 50%Φv [Typ.]	θ	120	°
Forward Voltage IF=350mA [Min.]	VF	2.7	V
Forward Voltage IF=350mA [Typ.]		3.3	
Forward Voltage IF=350mA [Max.]		3.8	
Reverse Current (VR=5V) [Max.]	IR	not designed for reverse operation	μA
Temperature coefficient of λpeak IF=350mA, -10°C≤T≤100°C [Typ.]	TCλpeak	0.16	nm/°C
Temperature coefficient of λdom IF=350mA, -10°C≤T≤100°C [Typ.]	TCλdom	0.14	nm/°C
Temperature coefficient of VF IF=350mA, -10°C≤T≤100°C [Typ.]	TCv	-2.0	mV/°C

KA-1010ZG9ZC

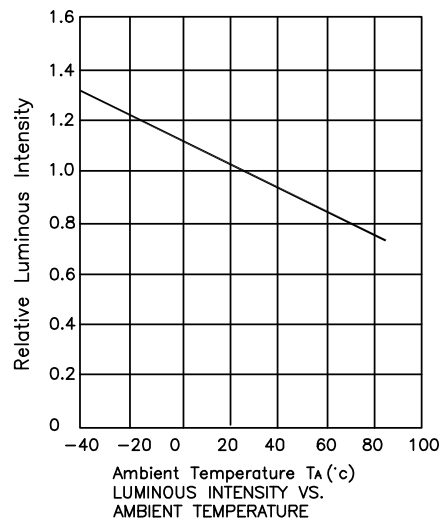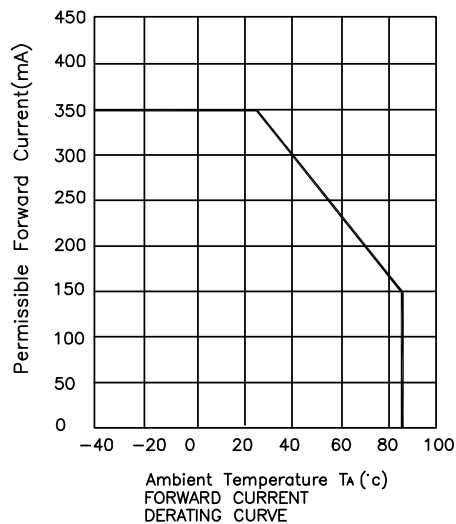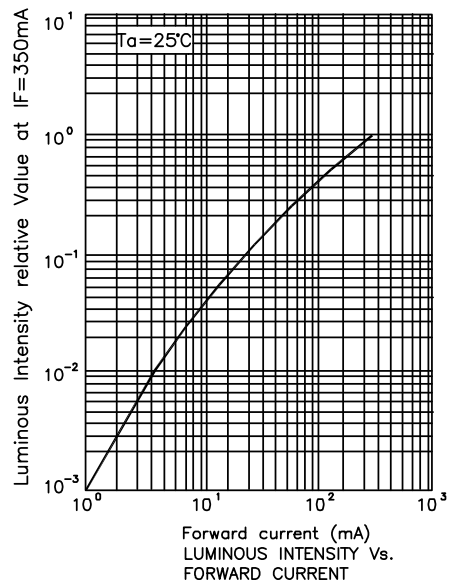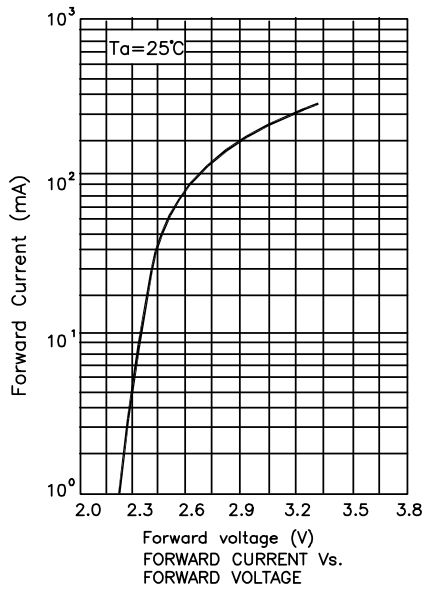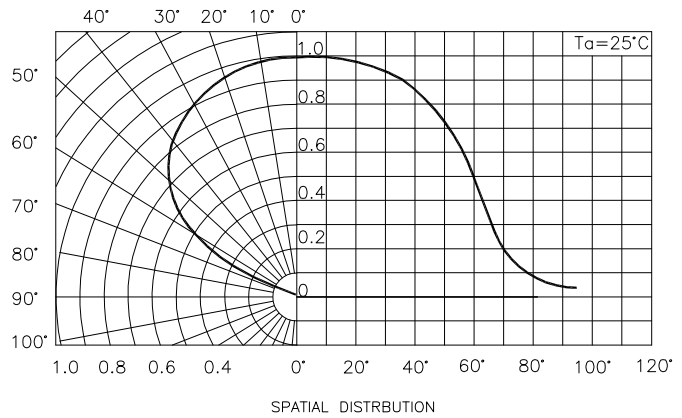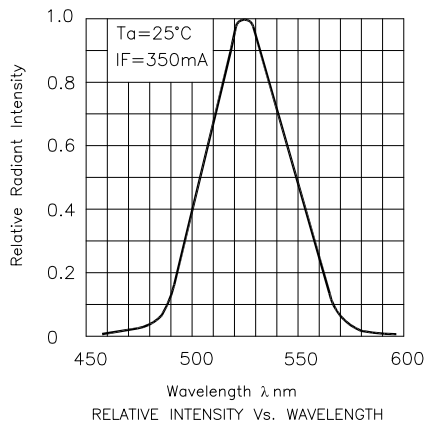

KA-1010ZG9ZC


Reflow Soldering Profile For Lead-free SMT Process.

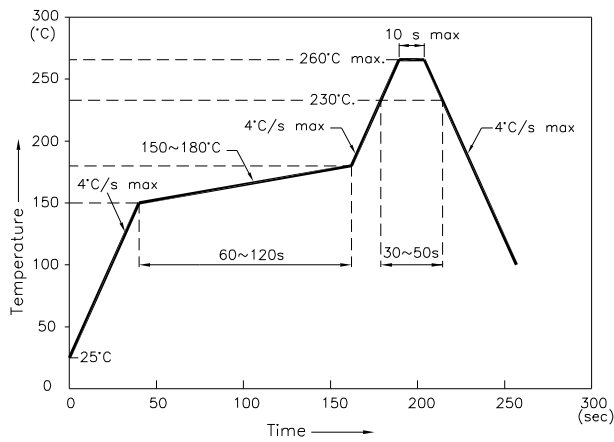


NOTES:

1. We recommend the reflow temperature 245°C(+/-5°C). The maximum soldering temperature should be limited to 260°C.
2. Don't cause stress to the epoxy resin while it is exposed to high temperature.
3. Number of reflow process shall be 2 times or less.


Recommended Soldering Pattern (Units : mm)

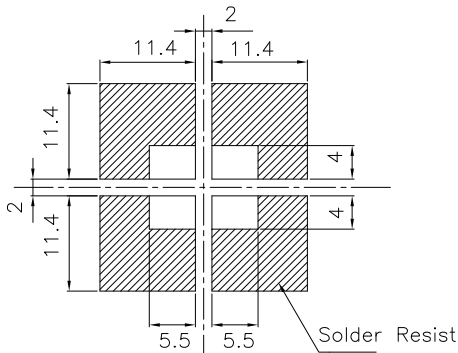

Reel Dimension

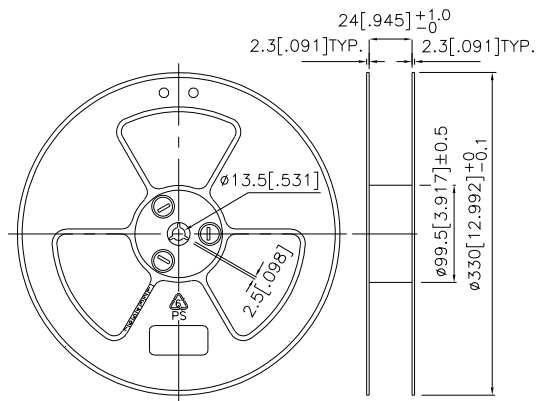

Tape Specifications (Units : mm)

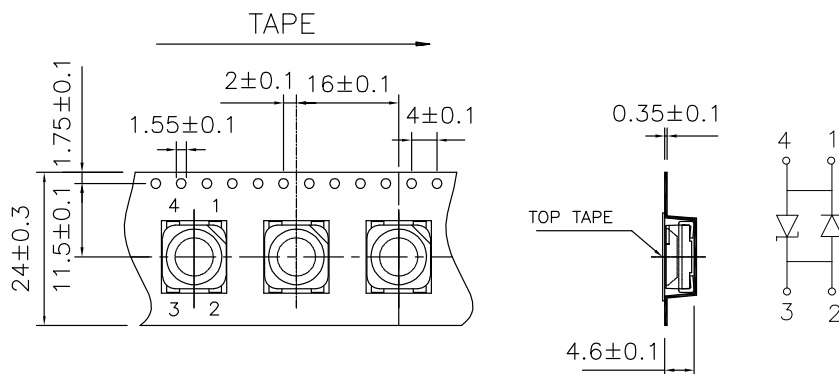

Remarks:

If special sorting is required (e.g. binning based on forward voltage, Luminous intensity/ luminous flux, or wavelength), the typical accuracy of the sorting process is as follows:

1. Wavelength: +/-1nm
2. Luminous intensity/ luminous flux: +/-15%
3. Forward Voltage: +/-0.1V

Note: Accuracy may depend on the sorting parameters.