


T-1 3/4 (5mm) ROUND LED LAMP

L-483

UNIT : MM(INCH)

TOLERANCE : $\pm 0.25(\pm 0.01)$

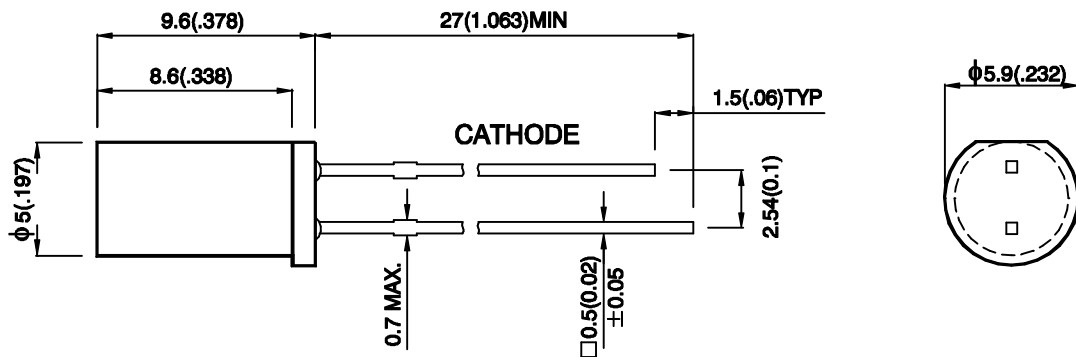

SELECTION GUIDE

PART NO.	SOURCE (DICE)	LENS TYPE (RESIN)	LUMINOUS INTENSITY MCD @10mA		VIEWING ANGLE 2 Θ 1/2
			MIN.	MAX.	
L-483YDT	YELLOW (GaAsP/GaP)	YELLOW DIFFUSED	1.3	8	100°
L-483GDT	GREEN (GaP)	GREEN DIFFUSED	1.3	8	100°
L-483EDT	ORANGE (GaAsP/GaP)	ORANGE DIFFUSED	3.2	12.5	100°
L-483HDT	BRIGHT RED (GaP)	RED DIFFUSED	0.5	3.2	100°
L-483IDT	RED HIGH EFFICIENCY (GaAsP/GaP)	RED DIFFUSED	3.2	12.5	100°
L-483NDT	PURE ORANGE (GaAsP/GaP)	ORANGE DIFFUSED	3.2	12.5	100°

APPROVED:

CHECKED:

DRAWN :

SCALE :

DATA NO. : D8199

3 : 1

DATE : SEP/30/97